
Eliminate the risk of providing your own HVAC system for a specialty environment *with a pre-engineered*, *pre-packaged Wine Guardian Pro system*.









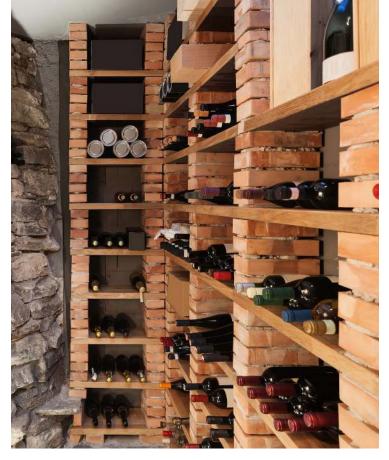

Split Systems Pre-engineered for

specialty environments and hotspots such as

- Fur storage
- Wine Cellars

Server rooms

- Cigar storage Instrument Storage
- Art storage









Ductable Split Systems

Ductable split systems are the most versatile specialty cooling system on the market for customers who expect the most advanced technology in a specialty cooling unit. Applications include wine cellars, art or document preservation, instrument or fur storage, computer closets, niche environments, and more; these units can be used in nearly any application.

All Inclusive

- 3,400 to 14,900 BTU/H cooling capacities
- 24-volt electronics for use with today's smart thermostats and building management systems
- Enhanced refrigeration controls
- High ambient protection
- Low ambient protection down to 20°F (-7°C)

Durable

- Aluminum body and **all-aluminum** evaporator coils (fins & tubes) are **corrosion-resistant**
- Standard high static pressure fan for extended lengths of ductwork
- Completely serviceable in the field

Flexible

- Utility piping in one easily accessible location
- Multiple evaporator outlet locations (Any of five sides)
- Versatile, space-saving slimline condensing unit is ideal for wall and pad mounting

Unique Options

- Bolt-on humidifier
- Electric heat
- X-treme low-ambient controls on condensing unit for-20°F (-29°C) operation





System Specifications (BTUH)*

Model	Wine Cellars (55°F/57%)	ASHRAE (80°F/50%)	Heat (kW)	Voltage (Hz)	
<u>SP50</u>	6,300	7,760	1.0	115	
<u>SP88</u>	9,600	10,690	2.0	230	
<u>SP200</u>	14,900	20,100	2.0	230	

* See detailed specifications for complete product performance specifications, above table to be used as a guide only, based on 90°F condenser inlet conditions and maximum evaporator airflow at 0.0" esp.


Maximum advisable operating conditions are ASHRAE rating conditions of 80/50% indoor at 95°F outdoor.

Note: Model SP25 is now apart of the <u>Sentinel Series</u>. View the <u>Product Brochure</u> for more information.

Wine Guardian USA: 1 (800) 825 3268 | 1 (315) 452 7400 wineguardian.com | info@wineguardian.com

Find a Distributor



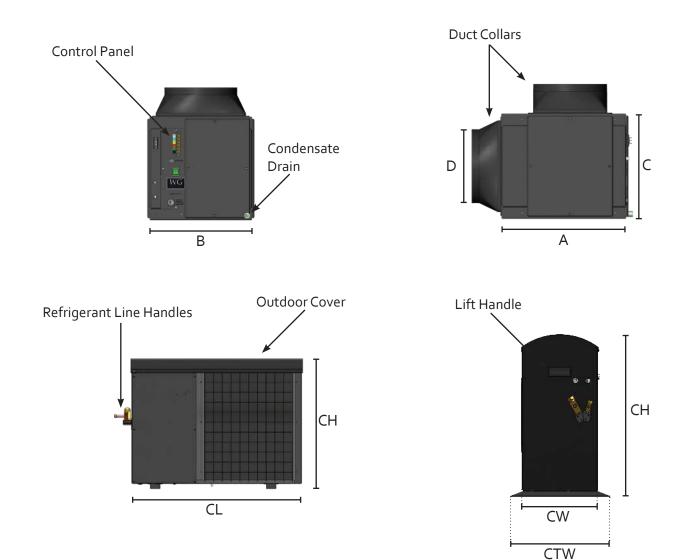

System Specifications*

Model	٨	В	C	C D	Weight	Outdoor Condenser**				
Model	A	D	C			CL	CW	CTW	CH	Weight
<u>SP50</u>	16 ^{3/4}	22	141/4	10	35	34	12	16	26	75
<u>SP88</u>	16 ^{3/4}	22	141/4	10	37	34	12	16	26	100
<u>SP200</u>	207/8	23	18	12	56	34	12	16	26	125

Note: Length, Width and Height in inches (in.); Weight in pounds (lbs.) *Specifications are subject to change

**Wine Guardian Condensing unit is patented.

US Patent No. D791294. EU Patent No. 003189349-0001

Note: Model SP25 is now apart of the <u>Sentinel Series</u>. View the <u>Product Brochure</u> for more information.

Rev 9/21

Wine Guardian USA: 1 (800) 825 3268 | 1 (315) 452 7400 wineguardian.com | info@wineguardian.com

Find a Distributor